

Type I aircraft de-icing fluid **SAFEWING® EG I 1996 (88)**



SAFEWING® EG I 1996 (88)

Clariant is the global leader in aircraft and runway de-icing products with over 40 years of experience. Our outstanding expertise in business relationships, product service, logistics and our world class research team make Clariant's Safewing®, Max Flight™, Octaflo™ and Safeway® products your preferred choice in the aviation business.

BENEFITS AT A GLANCE


- Low foaming application ensures easy identification of remaining frozen deposits on the wing.
- Excellent wetting ability avoids re-icing of already treated surfaces.
- Improved inhibitor package allows the use of fluid dilutions with water of different quality.
- Fully biodegradable additive package and low surfactant content formulation gives superior environmental profile.

PRODUCT DESCRIPTION

- Safewing® EG I 1996 (88) is a modern ethylene glycol based type I de-icing fluid.
- Safewing® EG I 1996 (88) meets and exceeds the requirements of the latest revision of AMS 1424.

PERFORMANCE

Safewing® EG I 1996 (88) has an outstanding spraying behaviour with almost no foaming and excellent wetting ability. Therefore, the minimum requirement of the water spray endurance time test (3 minutes) is exceeded by far.

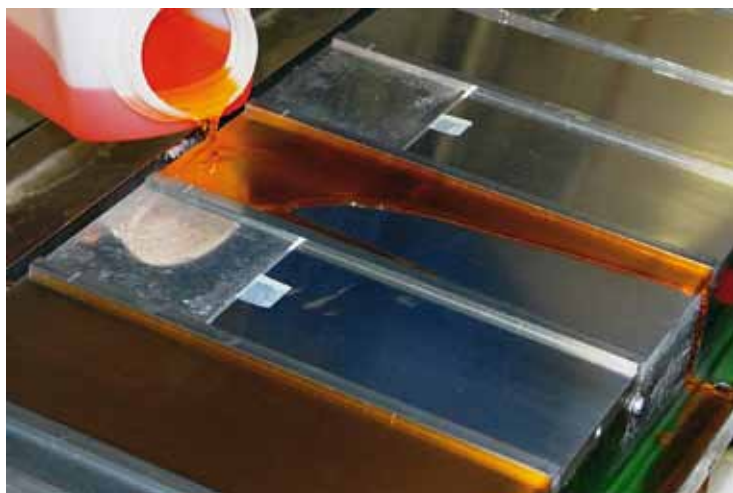

ENVIRONMENT

Safewing® EG I 1996 (88) contains a low amount of surfactant and a fully biodegradable, corrosion inhibitor package leading to a superior environmental profile.

Aquatic toxicity

LC ₅₀	(Fathead minnow, 96 h, OECD 203)	4.9 g/L
LC ₅₀	(Daphnia magna, 48 h, OECD 202)	3.1 g/L
EC ₅₀	(Bacteria, 16 h, OECD 209)	10 g/L

HANDLING

Safewing® EG I 1996 (88) is not critical to heating and can be stored during the winter season at high temperatures (up to +90 °C). Nevertheless, evaporation of water has to be avoided. Safewing® EG I 1996 (88) contains an especially developed inhibitor package which allows the use of almost any tap water even with high hardness while minimizing the formation of precipitates in the fluid.

CERTIFICATION AND APPROVALS

Safewing® EG I 1996 (88) is certified according to the latest revision of AMS 1424. Among this international standard, Safewing® EG I 1996 (88) is certified and approved by many airlines around the world.

SAFEWING® EG I 1996 (88)



PRODUCT PROPERTIES

Chemical Composition	88% aqueous ethylene glycol solution with corrosion inhibitors
Appearance	orange liquid
Refractive Index (20 °C)	1.421-1.424
pH (as is)	7.8-8.8
Density (20 °C)	approx. 1.107 g/cm ³
Freezing Point (diluted 1 : 1 with water)	< -20 °C
Kinematic Viscosity	9-15 mm ² /s
Surface Tension	43.4 dynes/cm
COD	1.2 kg O ₂ /kg
BOD ₅	0.52 kg O ₂ /kg

IN SERVICE LIMITS

Concentration (% Volume)	RI (+20°C)	Freezing Point (°C)	LOUT (°C)
100%	1,422	does not freeze	do not use
70%	1,398	-59	-44
65%	1,392	-52	-39
60%	1,389	-44	-33
55%	1,384	-37	-27
50%	1,380	-31	-21
45%	1,375	-26	-16
40%	1,371	-21	-11
35%	1,366	-17	-7
30%	1,361	-14	-4
25%	1,356	-11	-1
20%	1,351	-8	2

www.aviation.clariant.com
aviation@clariant.com

Contact Europe

Clariant International Ltd
BU Industrial & Consumer Specialties
Rothausstrasse 61, CH-4132 Muttenz

Commercial: +44 1454 411 789
Technical: +49 8679 752 14

Contact USA

Clariant Corporation
BU Industrial & Consumer Specialties
625 East Catawba Ave
Mt Holly, NC 28120

Commercial: +1 704 822 2677
Technical: +1 704 822 2184

This information corresponds to the present state of our knowledge and is intended as a general description of our products and their possible applications. Clariant makes no warranties, express or implied, as to the information's accuracy, adequacy, sufficiency or freedom from defect and assumes no liability in connection with any use of this information. Any user of this product is responsible for determining the suitability of Clariant's products for its particular application.

*Nothing included in this information waives any of Clariant's General Terms and Conditions of Sale, which control unless it agrees otherwise in writing. Any existing intellectual/industrial property rights must be observed. Due to possible changes in our products and applicable national and international regulations and laws, the status of our products could change. Material Safety Data Sheets providing safety precautions, that should be observed when handling or storing Clariant products, are available upon request and are provided in compliance with applicable law. You should obtain and review the applicable Material Safety Data Sheet information before handling any of these products. For additional information, please contact Clariant.

***For sales to customers located within the United States and Canada the following applies in addition:**

NO EXPRESS OR IMPLIED WARRANTY IS MADE OF THE MERCHANTABILITY, SUITABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE OF ANY PRODUCT OR SERVICE.

* Trademark of Clariant registered in many countries
© 2013 Clariant International Ltd

